


TGDY55



1

50/60Hz, 380V TT IT TN-S TN-C-S
SPD)

2

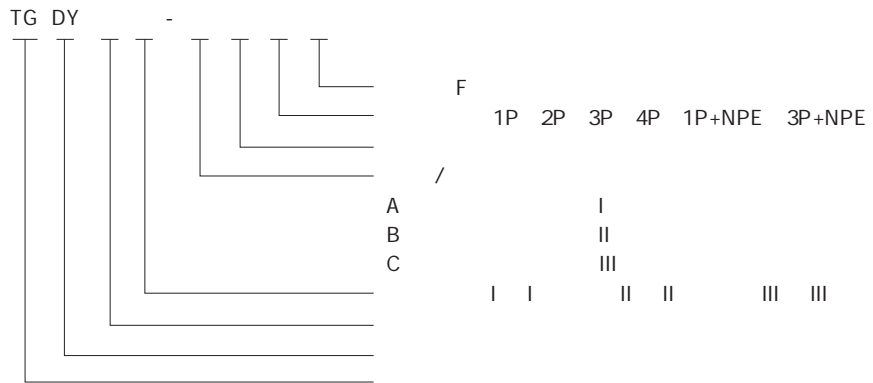

3

	TGDY55II-160	TGDY55II-120	TGDY55II-100	TGDY55II-80	TGDY55II-65
	GB/T18802.1 / IEC 61643.1				
	1P 2P 3P 4P	1P 1P+N 2P 3P 3P+N 4P			
(Hz)	50-60				
Un V	220/380				
Uc(V)	385		385 460		
Up (kV)	3.0	2.5	2.5	2.5	2.0
Inax (kA)	160	120	100	80	65
In (kA)	80	60	50	40	30
Ta (ns)	25				
L/N (mm ²)	25 35	16 25	16 25	16 25	16 25
PE (mm ²)	35	25 35	25 35	25 35	25 35
(A)	200	200	160	160	160
(A)	63/100/125	63/100/125	63/100/125	63/100	63/100
()	B/I				
()	C/T2/I1 (8/20us)				
	-5 +40		-40 +70		
	2000m				
	2.5 16mm ²		2.5 25mm ²		
	TH5-7.5				



			3
			(0/350us)
			+70
			0m
		mm ³	2.5 25mm ³
		5-7.5	



60.0 ± 0.8

48

FINAL-END PRODUCT SELECTION

