

TENGEN® 天正电气



浙江天正电气股份有限公司

ZHUJIANG TIANZHENG ELECTRIC CO., LTD.

★安全告知

★注意事项

- 1
- 2
- 3
- 4
- 5

1 概述

DDS2566

GB/T 17215.321-2021

50Hz 220V

SMT

2 产品规格（以铭牌上的技术参数为准）

DDS2566	A 2	220V	50Hz	0.05-0.2(10)A/2.5(10)A	6400i mp/kWh
				0.15-0.25(20)A/5(20)A 0.2-0.5(30)A/5(30)A	3200i mp/kWh
	B 1			0.3-0.75(40)A/10(40)A 0.4-1(60)A/10(60)A 0.4-1(60)A/15(60)A	1600i mp/kWh
				0.8-2(100)A/10(100)A	800i mp/kWh

3 运输和贮存条件

3.1

GB/T13384-2008

3.2

-25 70 ()

75%

3.3

5

5

3.4

3.5

4 主要技术参数

4.2.1

I		%	
		A	B
I _{tr} I I _{max}	1	± 2.0	± 1.0
	0.5L-1-0.8C	± 2.0	± 1.0
I _{min} I I _{tr}	1	± 2.5	± 1.5
	0.5L-1-0.8C	± 2.5	± 1.5
I _{st} I I _{min}	1	± 2.5*I _{min} /I	± 1.5*I _{min} /I

4.2.2

CCS = 1

0.04 I_{tr} B

0.05 I_{tr} A

4.2.3

110

4.2.4

0.9 1.1

0.7 1.2

: 2W 10VA

4.2.5

-10 55

-40 70

-40 70

75

30

95%

85

5 外形、安装尺寸与接线图

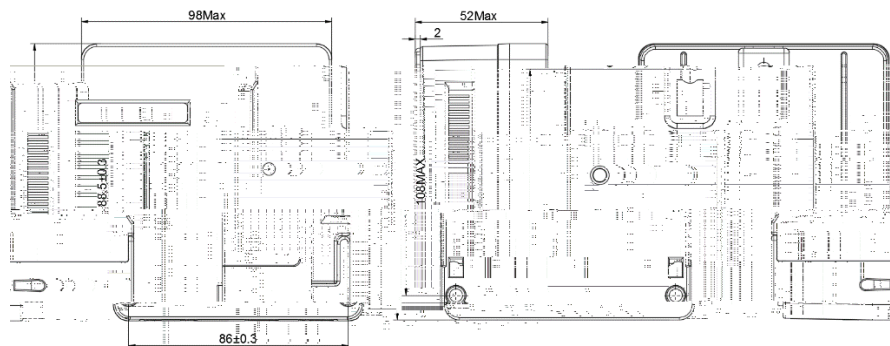


图1

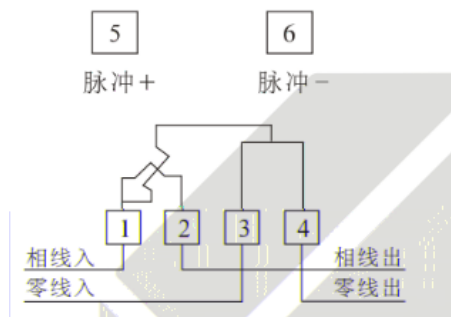


图2

6 安装和使用

6.1

6.2

2

1.8

6.3

6.4

6.5

I_{min} I_{max}

6.6

40A

6.7

7 常见故障及排除

7.1

7.2

8 产品质保期

